



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL  
EQUIPMENTS

# K600/3

## FEATURES

- ADJUSTABLE FLANGES
- EXTREMELY ACCURATE
- SUITABLE FOR INDUSTRIAL APPLICATIONS
- IDEAL FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTIONS

### PERFORMANCE

UP TO  
**6-60 L/MIN**

FLOW RATE

**30-70BAR**

OPERATING PRESSURE


**± 0,5%**

ACCURACY

**0,2%**

REPEATABILITY

The PIUSI K600/3 is an oval gear meter suitable for measuring the delivery of low, medium and high viscosity oils. The meter is equipped with an integrated filter and it is available also in pulser version.

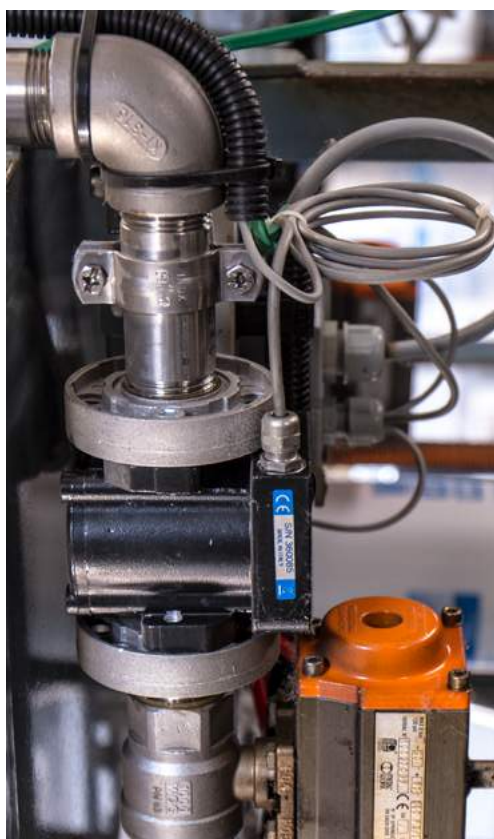**K600/3****K600/3 PULSER**

### PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
<b>METERS</b>						
FOO496A20	1,6	3,5	200X120X140	7,9X4,7X5,5		1
<b>PULSER</b>						
FOO472A20	2	4,4	200X120X140	7,9X4,7X5,5		1



FILTRATION



FLUID  
MONITORING



TANK  
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

## CHART

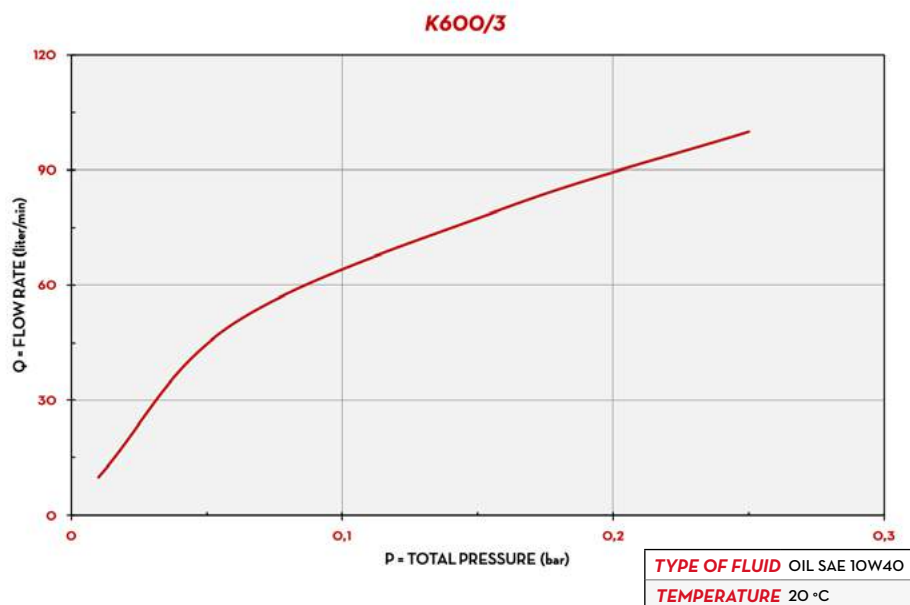

## DIMENSIONS

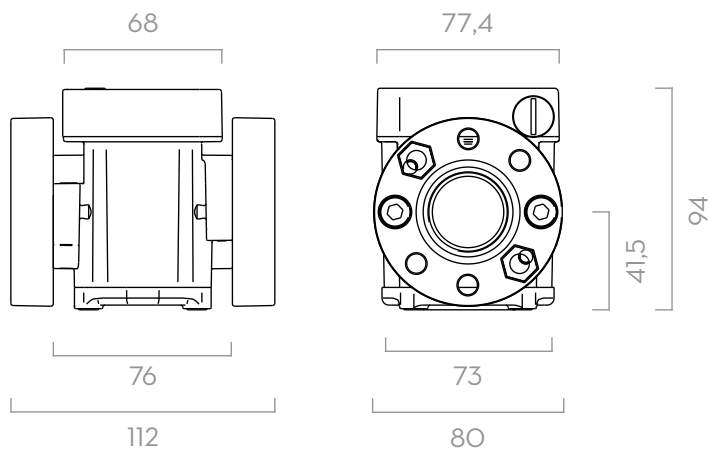

Dimensions expressed in millimeters

## IN THE BOX

- K600/3 METER
- INSTRUCTION MANUAL

## DETAILS



RESET / CALIBRATE BUTTON



OVAL GEAR







ALLUMINIUM BODY

## MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		BATTERY INCLUDED	FLANGE	INLET OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI	NO. 2 2X1,5V			
METER										
FOO496A20	K600/3 METER " BSP OIL	 	6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES
PULSER										
FOO472A20	K600/3 PULSER " BSP OIL	 	6 - 60	1,58 - 1,58	70	994	NO	YES	3/4" BSP	YES

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PRINT

**K600/3**