




204 mm

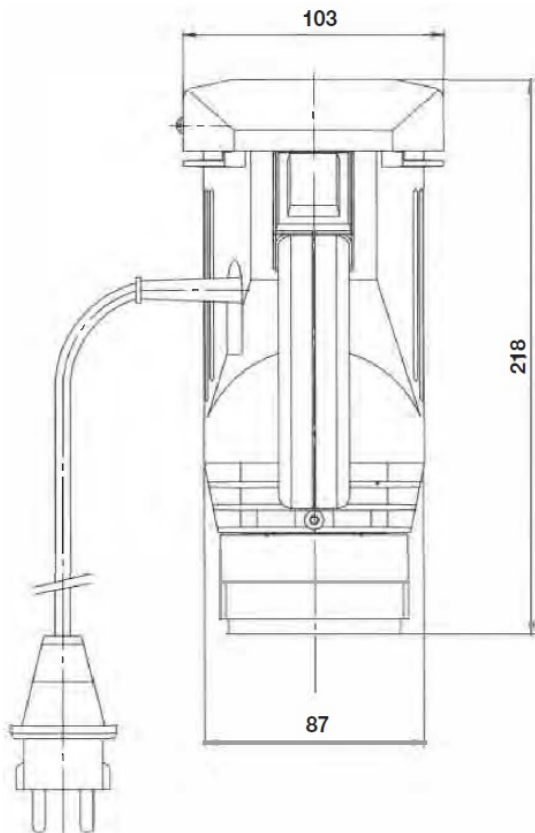

Light-weight motor for drum pumps suitable for laboratories or smaller filling requirements.
Ergonomic handle for an easy one-hand operation.
Thermal overload protection ensure operational safety.

Technical Specifications

Enclosure:	Open Drip Proof (IP44)
Voltage:	230V
Power Rating:	250 W
Phase:	1
Nominal Current:	1,2 A
Frequency:	50-60 Hz
Certification:	CE
Housing Material:	Thermoplastic Polyester Resin
Power Cord Length:	4,8 m
Power Cord Plug Type:	CEE 7/7
Noise Level:	70 dBa
Thermal Overload:	Yes
Fixed Speed:	9.500 rpm
Weight:	1,8 kg

flow capacity in connection with ex. SP-PPS series drum pump:

Max. Flow:	70 l/min
Max. Head:	5 meter
Max. Viscosity:	200 mPas
Max. Density:	1,2 kg/m ³