

FENOSAFE® FUEL Tank liner

*for the storage of fuels, oils, hydrocarbons
and alcohols*

- *DIBt approval*
- *for all fuels*
- *low permeation*



made in Germany by

FENOTEC

flexible • safe • innovative

www.fenotec.eu



General building supervision approval
DIBt- Nr.: Z-65.30-562

ESPECIALLY FOR SERVICE-STATIONS



For automotive fuel DIN EN 228 up to E20; alcohol DIN EN 14879-4, JET A1 and diesel DIN EN 590

- Meets the requirements of the norm DIN EN 13160-7:2003
- Meets the requirements of the upcoming norm DIN EN 13160-7: 2016
- Developed and tested together with the TÜV (German Technical Inspection Association), the PTB (National Metrology Institute of Germany) and the BAM (Federal Institute for Materials Research and Testing)

FAST INSTALLATION - SAFE OPERATION


- Installation of the leak protection lining only with short interruptions of the day-to-day business.
- Connection of accessories and leak detector is also possible without entering the tank.
- Effective leak and corrosion protection of the tank interior.

FENOSAFE® FUEL DIBt APPROVAL – PERMEATION 15 TIMES BELOW THE NORM

The ratio of **FENOSAFE® FUEL** to the DIN-NORM:

Max. permeation of fuel through the film:

g/d m²

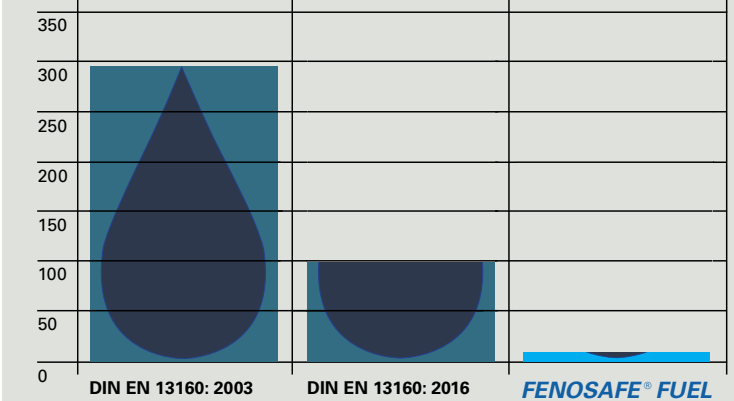

LEAK PROTECTION LINING	FENOSAFE® FUEL	FENOSAFE® U	FENOSAFE® Blue
DIBt-approval No.	Z-65.30-562	Z-65.30-487	Z-65.30-487
MEDIUM:			
Automotive fuel DIN EN 228 to E20	●	-	-
Alcohol DIN EN 14879-4	●	-	-
JET A1	●	-	-
Diesel DIN EN 590	●	●	-
Heating oil EL DIN 51603-1	-	●	-
Diesel exhaust fluid DIN 70070	-	-	●