



Engineered for transferring highly concentrated and aggressive liquids. Robust PVDF ensures excellent durability and chemical resistance against light to aggressive chemicals. Equipped with a battery powered turbine flow meter for controlling, measuring and dispensing neutral liquids, corrosive chemicals (acids & alkalis) and many other non-flammable liquids.

## Technical Specifications

**Package Includes:**..... Motor, Pump Tube, Hose, Hand Nozzle  
 ..... Wall Bracket, Barrel Adaptor & Flow Meter

**Motor Type:**..... 230V, 950 W, IP54, Variable Speed Drive

**Pump Tube Material:**..... PVDF, Hastelloy C-276, Carbon Graphite

**Immersion Length:**..... 39" (1000 mm) or 47" (1200 mm)

**Discharge Hose:** .....Chemical / ATEX hose, 1,8 m, 1"(25 mm) I.D.

**Hand Nozzle Material:** ..... PVDF, Viton

**Flow Meter Material:** ..... PVDF, Viton, Halar, Ceramic

**Flow Meter Type:**.....Digital / Battery Powered Totalizer

**Maximum Flow Rate:**..... 61 L/min *based on water*

**Maximum Viscosity:** ..... 300 cps (mPas)


**Maximum Temperature:** ..... 80° C

**Shipping Weight:**..... 31 lbs. (13,06 kg)



## DRUM & IBC Tanks

Package P/N	Motor	Power	Pump Tube
9590	SPE-950V	950 W	SP-PVDF-39
9591	SPE-950V	950 W	SP-PVDF-47

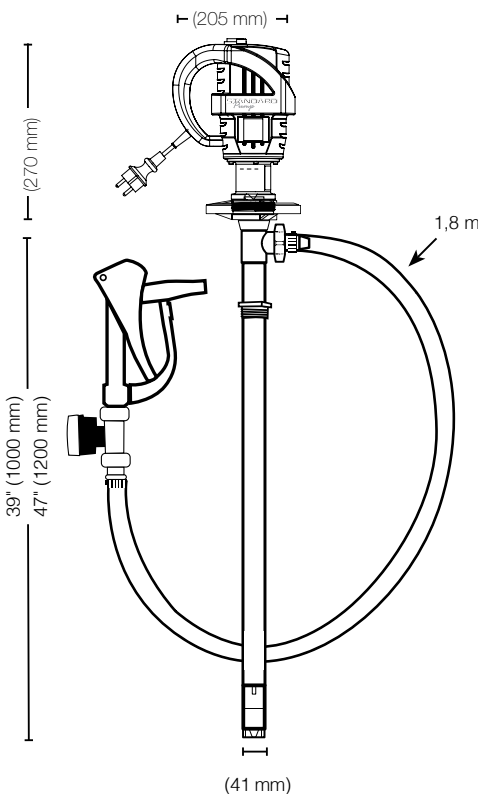

**Warning: This pump is not suitable for use with Flammable/Combustible liquids.**

\*Note: When pumping viscosities over 1,000 cps, pump must be used intermittently to avoid potential premature failure and/or damage.